

# APOLLO UNDERGROUND MINING TYRES




**APOLLO TERRA LS**  
26.5-25 36PR L5S  
18.00-25 28PR L5S  
17.5-25 28PR L5S

**APOLLO TERRA SP**  
16.00-25 36PR L4





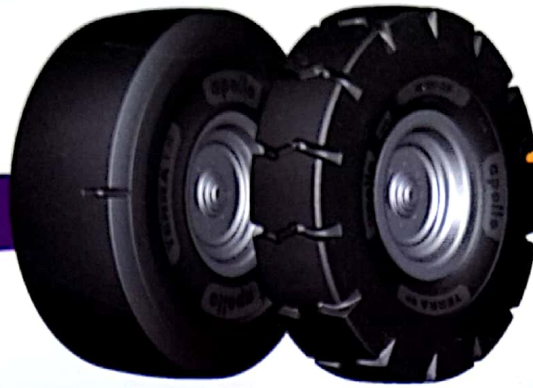

**APOLLO TERRA LS**

**APOLLO TERRA SP**

**SUPERIOR PERFORMANCE FOR NON STOP OPERATIONS**

- Reinforced Tread Compound with premium carbon black for excellent **traction, cut resistance**
- Flat Tread Arc Radius for **High traction, even wear**
- Tie Bar in Terra SP for **higher lug stability**
- Optimized 14 lugs for **high traction in Terra SP**

**LONG LIFE FOR HIGHEST RETURN ON INVESTMENT**

- Cooler running base compound for **Long tread life**
- Dry bonding ply technology for **excellent ply adhesion & avoiding tread separation.**
- Stiff nylon casing for **long casing life**

**DESIGNED FOR RELIABILITY**

- High Gauge Sidewall with cut resistant compound for **tread protection**
- Rim Protector on 26.5-25 to **prevent Rim damage during rough operations**
- Cut resistant Kerb Rib to **avoid sidewall damage from external debris**
- Strong bead wires with thicker profile , more number of wires for a **Firm fit & efficient torque transfer**

SIZE	PR	TRA CODE	PRODUCT NAME	LOAD INDEX	RIM SIZE	LOAD CARRYING CAPACITY (KG)	Inflation Pressure		OD (MM)	SW (MM)
							KPA	PSI		
16.00-25	36	L4	TERRA SP	199A2	11.25x2-25	13600	975	141	1542	400
26.5-25	36	L5S	TERRA LS	209A2	22.00x3-25	18500	625	91	1780	660
17.5-25	28	L5S	TERRA LS	188A2	14.00X1.5-25	10000	825	120	1387	437
18.00-25	28	L5S	TERRA LS	199A2	13.00X2.5-25	13600	650	94	1668	498

